



All Purpose Products

3006 All Purpose **ULTRA** Elastomeric Sealant

White Lightning® 3006 Ultra All Purpose Elastomeric Sealant is a premium sealant featuring outstanding flexibility and adhesion to most surfaces. Ideal for any caulking project and can be used on drywall, wood, glass, masonry, concrete, metal, porcelain or plastic. Ideal for filling joints where more movement is expected.

- Up to 70% total joint movement
- Dries non-tacky—limits dirt pickup
- Bright white finish
- ECOGUARD™ Anti-Microbial Protection
- Paintable
- Water Clean-up
- Interior and exterior application



Product Profile

Packaging:

3006 Ultra Elastomeric Sealant	Color	Order #	UPC	Size	Case Pack
	White	WL0003006	0-23275-14761-4	10 FL OZ	12
	Clear	WL0003067	0-23275-14762-1	10 FL OZ	12
	Gray	WL0003068	0-23275-03068-8	10 FL OZ	12
	Black	WL0003069	0-23275-03069-5	10 FL OZ	12




Indoor/Outdoor Use



Paintable



Water Clean-up

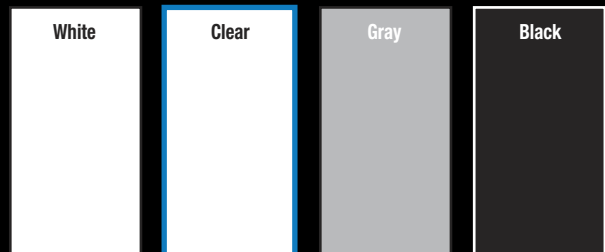

See opposite side for technical information

3006 Ultra All Purpose Elastomeric Sealant

Physical Properties:

3006 Ultra All Purpose Elastomeric Sealant

Type:	Acrylic
Color:	White, Clear, Black and Gray
Shelf Life:	12 Months
Flash Point:	N/A (water based)
Flammability:	N/A (water based)
Full Cure Time:	5-7 days at 75° F
Tack Free Time:	10 Minutes at 75° F
Application Temperature:	Above 40° F
Service Temperature:	-30° F to 180° F
Odor:	Low
Shrinkage:	Low
Vehicle:	Water
Solids by Weight:	81.3% +/- .2%
Weight/Gallon:	12.67 +/- 0.2 lbs/gal
Painting:	Paintable

Performance Data:

Joint Movement Capability:	Withstands up to 35% joint movement
Joint Size:	1/8" x 1/8" to 1/2" x 1/2"
Freeze-Thaw Stability:	Stable Through 5 Cycles
Clean-Up:	Water
Flexibility:	Excellent
Durability:	Excellent
Mildew Resistance:	Excellent
Water Resistance:	Good
Painting:	Paintable

Product Description:

White Lightning® 3006 Ultra is a premium quality acrylic latex caulk ideal for interior and exterior applications.

Surface Preparation:

Remove old caulk. Clean thoroughly to remove grease, dirt, oil, wax, loose paint, dust and soap film. Remove mildew with bleach and detergent that does not contain ammonia. Rinse surfaces and allow to dry.

Painting:

A minimum of 4 hours dry time is required before painting with latex or oil based paint. Allow extra dry time during periods of high humidity and/or cool temperatures.

Clean-Up:

Promptly clean tools and excess caulk with water or a damp cloth.

Cautions:

Use only with adequate ventilation. Avoid contact with eyes and skin. Wash hands after using. Do not transfer contents to other containers for storage.

Limitations:

For best results, apply at temperatures above 40° F and allow 24 hours to cure before exposing to moisture. Do not apply to frozen or frost covered surfaces. Not for use below grade, on aquariums or for marine use below the water line.

Specifications:

Exceeds performance requirements of Federal Specification TT-S-00230C Type II Class A and meets performance requirements of C-920 Class 35.



For more information please call or write:

White Lightning® Products • 101 Prospect Ave. NW • Cleveland, OH 44115
1-800-241-5295 Option 1 Customer Service • 1-800-241-5295 Option 2 Technical Service
www.wlcaulk.com